

NWETF2733-0

2.7 – 3.3GHz

Electronically Tunable Filter

v 2.1

GENERAL DESCRIPTION

The NW ETF products are electronically tunable filters that offer wideband operation, fast electronic adjustment of center frequency and bandwidth.

The Electronically tunable filter (ETF) has the following basic characteristics which can be customized based on application:

The version of the ETF presented in this data sheet provides 40MHz 3dB pass band and 30dB transition band of 25MHz at center frequencies from 2.7GHz to 3.3GHz. The filter bandwidth can be electronically controlled over the range 40MHz to 100MHz. Frequency switching speed below 100microseconds is typical.

The ETF technology can be scaled in frequency from 1GHz to 40GHz and the architecture can also be modified on request to provide high pass, low pass and band reject filter transfer functions. Filter bandwidths and transition bands can also be customized based on requirement.

The ETF technology is ideal for applications which require low power frequency agile filtering at microwave frequencies.



Figure 1: S-Band Electronically Tunable Filter

FEATURES

- Custom band pass characteristics.
- Wide operating frequency
- Fast center frequency adjustment speeds.
- Electronically adjustable bandwidth.
- Electronically adjustable filter center frequency.
- MIL-PRF-38534 construction
- Subject to Nanowave international patent CA2852383A1, US9264017, EP2982037A4.

APPLICATIONS

- RADAR
- Communications
- EW/SIGINT

NANOWAVE Technologies Inc.

425 Horner Avenue
Etobicoke, ON M8W 4W3
Canada

Phone: +1 416 252-5602
Fax: +1 416 252-7077

Copyright © 2024 NANOWAVE Technologies Inc. All rights reserved.
The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

NWETF2733-0

2.7 – 3.3GHz

Electronically Tunable Filter

v 2.1



ELECTRICAL PARAMETERS

Parameter	Unit	Min	Typ	Max	Remarks
Center Frequency (fc)	GHz	2.7		3.3	Electronically controlled bandwidth. Operation can be set to cover RADAR bands L,S,C,X,Ku,K,Ka.
Center frequency control	MHz		1		<1Hz bandwidth control to full band
Pass-band 3 dB Bandwidth	MHz	40		100	Electronically adjustable bandwidth customization available on request.
Bandwidth adjustment resolution	MHz	1			<1Hz bandwidth control to full band on request
Gain in pass-band @ fc	dB	-1	0	1	Input power = -20 dBm used for test case.
Maximum Ripple within Pass-band (pk-pk)	dB			2.0	Depending on inter stage filter specification
Flatness across every 200 MHz	dB		± 1.0	± 2.5	
Input return Loss	dB	20	15	7.5	Return loss subject to operational bandwidth
Output return Loss	dB	20	15	7.5	Return loss subject to operational bandwidth
30 dB Transition band	MHz		25		Stop band attenuation to 50dB on request.
1 dB Input Compression Point	dBm		-10		Higher Maximum compression point available on request.
Maximum Input Power Level	dBm			0	Higher input power level on request
Noise Figure	dB			20	
Passband frequency set speed	µs	50	100	150	Sub 50us available on request.
DC supply	V			15	
DC current	A			1	
Spurious Level	dBc	-60		-50	
Control Interface			DB25-F		Digital interface can be customized on request.

Notes:

1) The operational parameters for the ETF captured in this data sheet are to show the capability of the technology with respect to one implementation. The operational parameters can be customized for a particular application.

MECHANICAL AND ENVIRONMENTAL PARAMETERS

Parameter	Unit	Min	Typ.	Max	Remarks
Operating Temperature Range	°C	10		+50	Extended temperature on request.
Non-operating Temperature Range	°C	0		+50	
Size (length, width, height)	Inches		10.7 x 8.6 x 1.9		
Mass	kg		1.6		Subject to change based on filter.
Digital/DC Power connector			DB25-F		
RF Output Connector			SMA-F		
RF Input Connector			SMA-F		
Marking	Manufacturer name, model, serial number, date code				

Notes: Specifications subject to change without notice.

NANOWAVE Technologies Inc.

425 Horner Avenue
Etobicoke, ON M8W 4W3
Canada

Phone: +1 416 252-5602
Fax: +1 416 252-7077

Copyright © 2024 NANOWAVE Technologies Inc. All rights reserved.

NWETF2733-0

2.7 – 3.3GHz

Electronically Tunable Filter

v 2.1

MEASURED PERFORMANCE

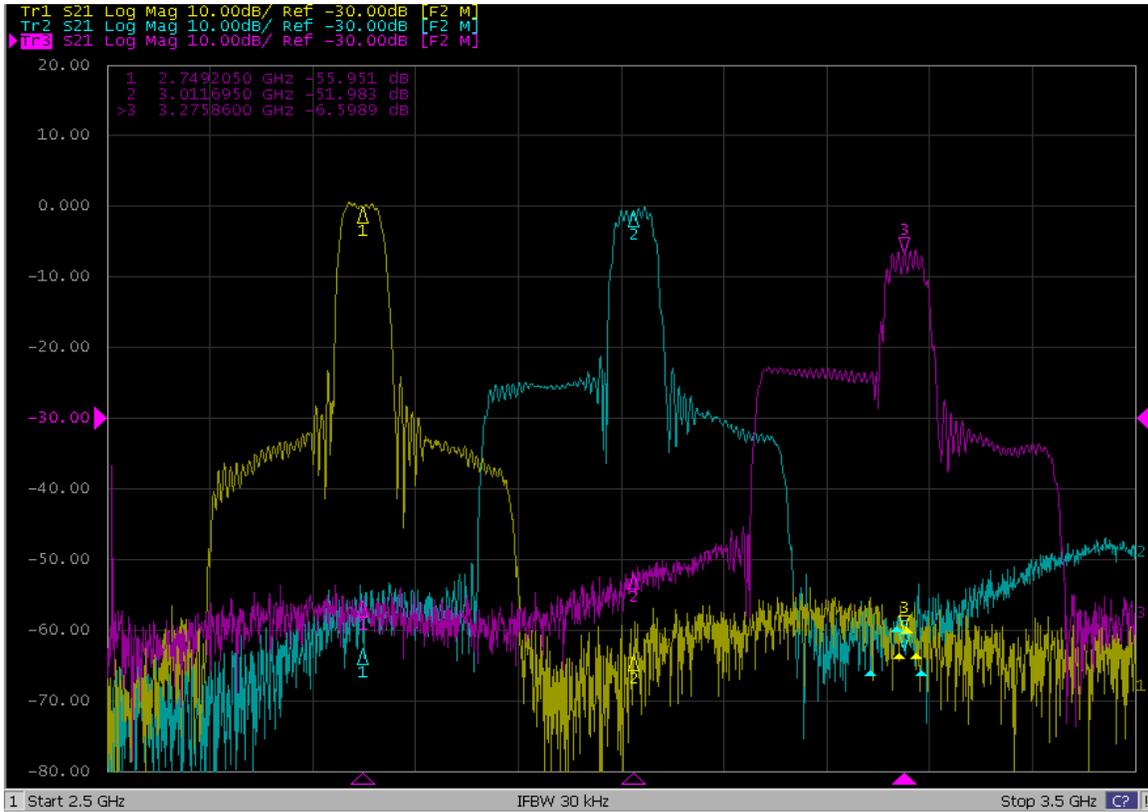


Figure 2: 40MHz 3dB Pass-Band electronically set over band 2.7GHz to 3.3GHz in steps of 30MHz

NWETF2733-0

2.7 – 3.3GHz

Electronically Tunable Filter

v 2.1

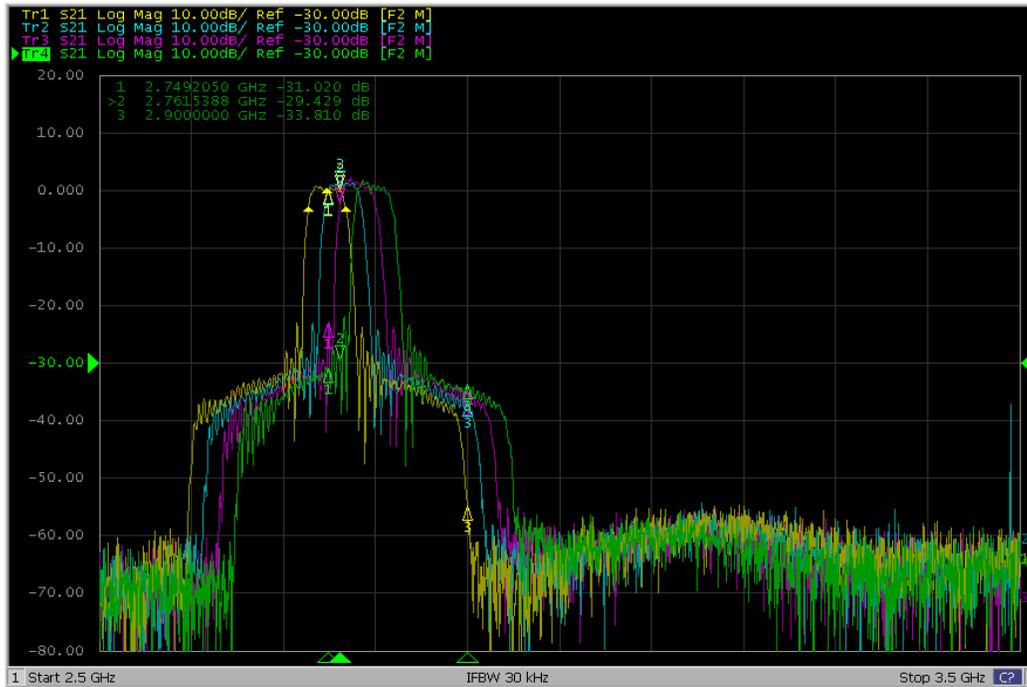


Fig 3: Pass-Band fine center frequency adjustment in steps of 17MHz from 2.7GHz to 2.77GHz

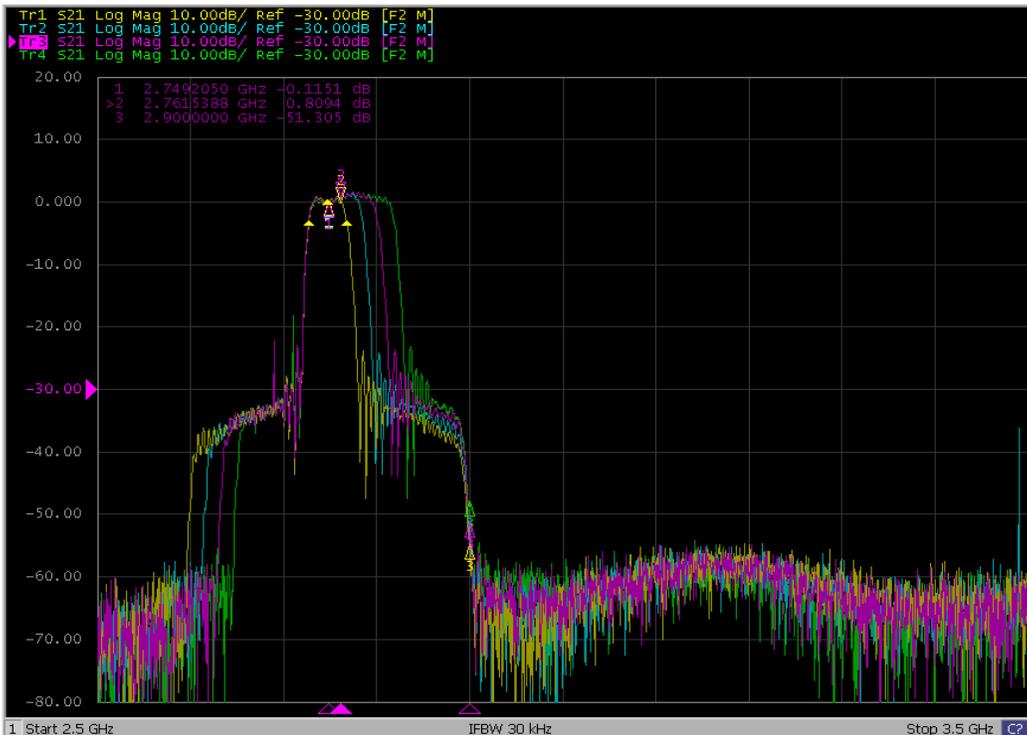


Fig 4: Electronic Bandwidth adjustment from 40MHz to 100MHz

COMMUNICATION AND CONTROL INTERFACE

NANOWAVE Technologies Inc.

425 Horner Avenue
Etobicoke, ON M8W 4W3
Canada

Phone: +1 416 252-5602
Fax: +1 416 252-7077

Copyright © 2024 NANOWAVE Technologies Inc. All rights reserved.

NWETF2733-0

2.7 – 3.3GHz

Electronically Tunable Filter

v 2.1



The ETF can be controlled via a Graphical User Interface (GUI) for the purpose of test. Communication to the unit is conducted using an SPI interface allowing center frequency and bandwidth to be set from the system. The unit's internal temperature and supply voltages can also be monitored as part of a built in self-test capability.

OUTLINE DRAWING

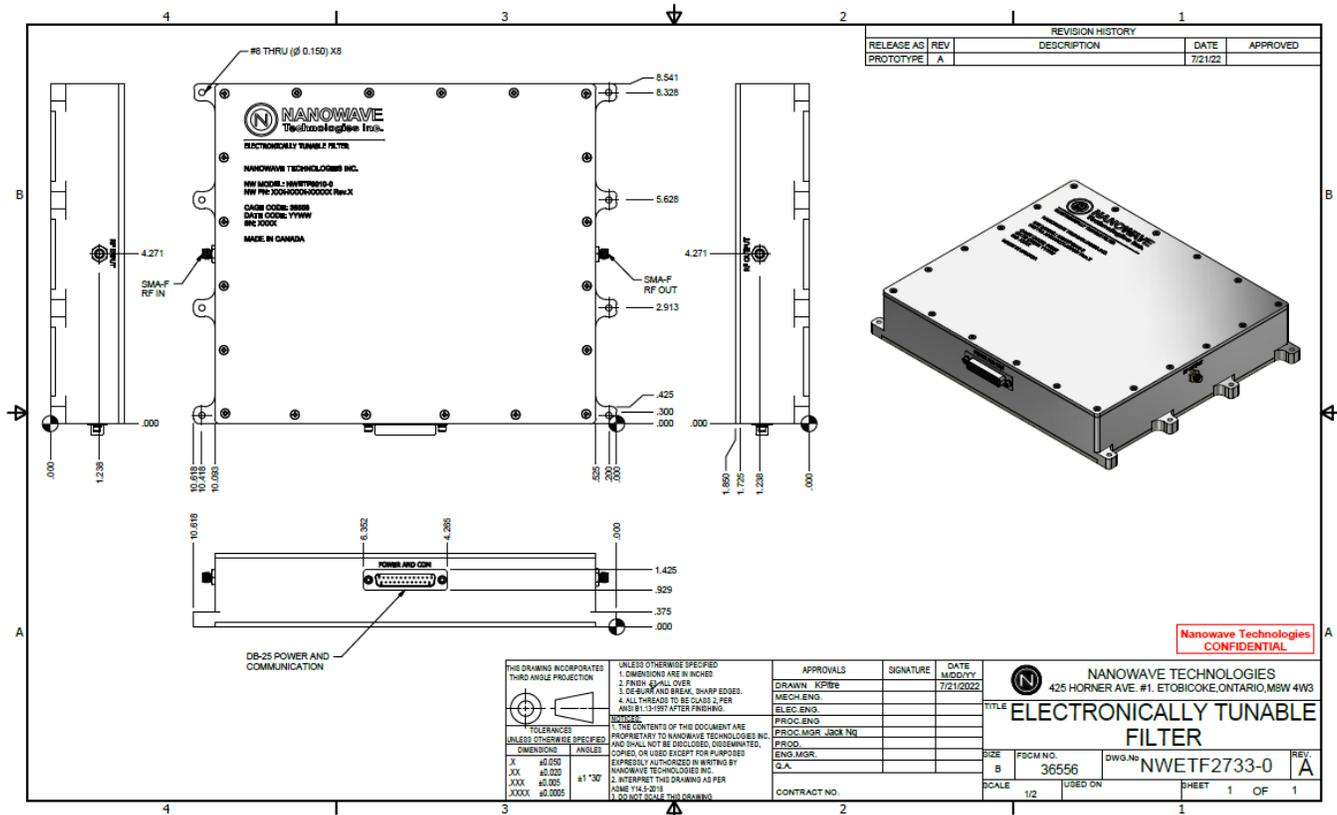


Fig 5: Outline drawing of S-band Electronically Tunable Filter

Additional features:

- Marking: The unit is marked with manufacturer part no., date code, and Serial Number.
- All plating and painting is RoHS compliant

For further information please contact NANOWAVE Technologies Inc. at sales@nanowavetech.com, or call at (+1) 416-252-5602