

NWO0408-10

4 – 8GHz

Wideband Synthesizer Drop-in

v 1.2

General Description

The NWO0408-10 is a fully integrated wideband C-band synthesizer module based on hybrid architecture that combines high speed Digital Direct Synthesis with indirect synthesis techniques into one compact hermetic package. The unit requires an external 100MHz reference and delivers an average output power of +10 dBm. The phase noise is exceptionally low with -120 dBc/Hz @ 100 kHz offset measured at 8 GHz output frequency and spurious lower than -55 dBc.

The NANOWAVE in-house HMIC process is used within the design to meet a high level of reliability whilst ensuring a small form factor and small size. This makes the NW WBC an ideal choice for airborne radar systems

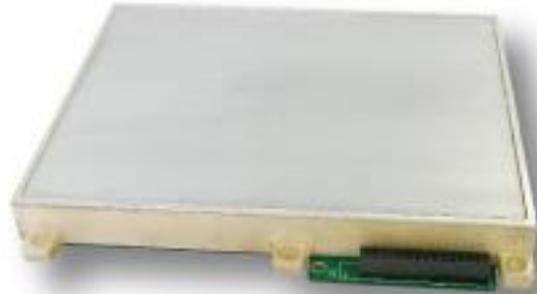


Figure 1: C-Band Synthesizer Drop-In Module

Features

- Exceptionally low phase noise
- Fast frequency switching
- MIL-PRF-38534 construction
- Low G sensitivity

Applications

- Radar
- Electronic Warfare
- High vibration environments

Typical Performance (T=25°C)

| Parameter | Unit | Min | Typ | Max | Remarks |
|--------------------------------|--------|-------|-------|-------|---------|
| Operating Frequency Range | GHz | 4.0 | | 8.0 | |
| Step Size | Hz | 1.0 | | | |
| Output Power Level | dBm | | +10.0 | | |
| Phase Noise @ 4 GHz at offset: | | | | | 1) |
| @ 10 Hz | dBc/Hz | -80 | -77 | -74 | |
| @ 100 Hz | dBc/Hz | -95 | -92 | -89 | |
| @ 1kHz | dBc/Hz | -106 | -103 | -100 | |
| @ 10 kHz | dBc/Hz | -117 | -114 | -111 | |
| @ 100 kHz | dBc/Hz | -120 | -117 | -114 | |
| @ 1MHz | dBc/Hz | -121 | -118 | -115 | |
| @ 10 MHz | dBc/Hz | -137 | -134 | -131 | |
| @ 100 MHz | dBc/Hz | -157 | -154 | -151 | |
| Spurious Level | dBc | -55.0 | -60.0 | | 2) |
| Harmonics Level | dBc | -40.0 | | | 3) |
| Frequency Settling Time | µs | | | 100.0 | 4) |
| Output Return Loss | dB | | 15.0 | | |

NANOWAVE Technologies Inc.

425 Horner Avenue
Etobicoke, ON M8W 4W3
Canada

Phone: +1 416 252-5602
Fax: +1 416 252-7077

Copyright © 2024 NANOWAVE Technologies Inc. All rights reserved.
The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

NWO0408-10

4 – 8GHz

Wideband Synthesizer Drop-in

v 1.2



| Parameter | Unit | Min | Typ | Max | Remarks |
|---------------------------|------|------|-------|------|---------|
| Reference Input Frequency | MHz | | 100.0 | | |
| Reference Power Level | dBm | -5.0 | | +5.0 | |
| Reference Waveform Type | | | | | Sine |

Notes:

- 1) Performance at offset frequencies below 10 kHz is subject to change with different 100 MHz reference.
- 2) Worst case Spurious at 5 MHz frequency steps. Spurious can be optimized for specific narrow band and step size.
- 3) Low pass filtering can be added on request for better harmonics performance.
- 4) Frequency settling time measured for 1GHz step.

Mechanical and Environmental Parameters

| Parameter | Unit | Min | Typ | Max | Remarks |
|------------------------------|------|-------|-------|--------|---------|
| Operating Temperature Range | °C | -40.0 | | +85.0 | |
| Storage Temperature Range | °C | -55.0 | | +100.0 | |
| Output Connector | | | GPO | | |
| Size (length, width, height) | cm | | 12.45 | | |
| | cm | | 9.91 | | |
| | cm | | 1.52 | | |

Notes: Specifications subject to change without notice.

Measured Data

Phase Noise at 8GHz



Phase Noise at 4GHz



Additional features:

- Marking: the unit is marked with manufacturer part no., date code, and Serial Number.
- All plating and painting is RoHS compliant

For further information please contact NANOWAVE Technologies Inc. at sales@nanowavetech.com, or call at (+1) 416-252-5602.