

NWPA2040-50

2 – 4GHz 100W (CW)

Broadband Linear SSPA

GENERAL DESCRIPTION

The NWPA2040-50 is a highly linear solid-state power amplifier (SSPA) for continuous wave (CW) operation based on GaN device technology. The minimum output power at 1 dB compression at output is 50.0 dBm (100 W) minimum.

The amplifier offers very low gain and phase ripple over the frequency band of 1.9 to 4.1 GHz. The group delay time variations are less than ± 100.0 ps within the whole band.

This amplifier is designed for applications which demand very high linearity. The amplifier is typically arranged in arrays of e.g. 32 units, and therefore offers very low gain and phase variances across the ensemble of amplifiers. Typical applications are e.g. Stochastic Cooling Systems of Particle Accelerators, or highly linear communication systems. Other frequency ranges (e.g. 1.0 to 2.0 GHz, or 4.0 to 6.0 GHz) as well as higher output power levels are available on request.

The SSPA unit and Power Supply can be within the same enclosure, or in separate units connected by a control and supply harness of up to 15 m length.



FEATURES

- Ultra-linear CW SSPA
- 2 GHz Bandwidth with low Group Delay Time Variation
- Frequency: 2000–4000 MHz
- Water Cooling of SSPA, PSU with FAN Cooling
- Ethernet Control Interface

APPLICATIONS

- Particle Accelerator Technology
- In a set of N x 8 Amplifiers for Stochastic Cooling of high-energy particles

ELECTRICAL PARAMETERS

| Parameter | Unit | Min | Typ | Max | Remarks |
|--|------|-----|------|-----------|---------|
| Frequency range | GHz | 2.0 | | 4.0 | |
| Gain | dB | | 45.0 | | |
| Gain variation amplifier-to-amplifier | dB | | | ± 0.5 | |
| Gain variation vs frequency @ 10dB below OP-1dB 2) | dB | | | ± 1.0 | |

NANOWAVE Technologies Inc.

425 Homer Avenue
Etobicoke, ON M8W 4W3
Canada
Phone: +1 416 252-5602
Fax: +1 416 252-7077
Email: sales@nanowavetech.com

Copyright © 2025 NANOWAVE Technologies Inc. All rights reserved.
The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

| Parameter | Unit | Min | Typ | Max | Remarks |
|---|------|------|-----|--------|--|
| Gain variation vs frequency @ OP-1dB | dB | | | ± 1.5 | |
| Maximum gain with phase error $ \Delta\phi > 60$ deg relative to mean gain | dB | | | -5.0 | For any in-band frequency |
| Electrical length | m | 3.0 | | 4.0 | 3) |
| Variation of phase relative to electrical length @ 10dB below OP-1dB | deg | | | ± 10.0 | |
| Variation of phase relative to electrical length @ OP-1dB | deg | | | ± 15.0 | |
| Input reflection factor | dB | | | -10.0 | In range 1.9 – 4.1 GHz 1) |
| | dB | | | -8.0 | In range 1.8 to 4.2 GHz 1) |
| Output reflection factor | dB | | | -10.0 | In range 1.8 to 4.2 GHz 1) |
| Noise Figure | dB | | | 6.0 | In range 1.9 – 4.1 GHz |
| | dB | | | 7.0 | In range 1.8 to 4.2 GHz |
| 1 dB compression point at output 2) | dBm | 50.0 | | | |
| 3rd order intercept point at output | dBm | 57.0 | | | |
| Group delay time ripple | Ps | | | ±100.0 | |
| Tolerable load impedance | Ohm | 0 | | ∞ | Unconditionally stable |
| Maximum tolerable input power | dBm | 13.8 | | | Is10dB above the input power which drives amplifier into 1dB compression |

Notes:

- 1) S_{11} , S_{21} , S_{12} , S_{22} are the scattering parameters of the amplifier, The input port 1 and the output port 2 have the reference impedance Z_L . The reference planes are at the case of the amplifier. $|S_{ij}|$ are the magnitudes of S_{ij} . $\overline{|S_{ij}|}$ are the arithmetic mean values of $|S_{ij}|$ over the given frequency range.
- 2) OP_{-1dB} is the lowest value of the 1 dB compression point over the frequency range 2.0 to 4.0 GHz.
- 3) The phase φ of the complex transmission $S_{21} = |S_{21}|e^{i\varphi}$ is a superposition $\varphi = \varphi_{lin} + \Delta\varphi$ of a frequency-linear part φ_{lin} and a frequency dependant part $\Delta\varphi$. The frequency-linear part φ_{lin} is defined as $\varphi_{lin} = \frac{L_{el}}{c} \cdot f$, where L_{el} is the electrical length of the amplifier and c is the vacuum speed of light. $\frac{L_{el}}{c}$ has to be calculated from a affine linear least square fit of φ over the frequency range from 2 to 4 GHz

Mechanical and Environmental Parameters

| Parameter | Unit | Min | Typ | Max | Remarks |
|-----------------------------|------|-----|-----|-----|---------|
| Operating Temperature Range | °C | | | | |
| Input / Output Connectors | | | SMA | | Female |

NANOWAVE Technologies Inc.

425 Horner Avenue
 Etobicoke, ON M8W 4W3
 Canada
 Phone: +1 416 252-5602
 Fax: +1 416 252-7077
 Email: sales@nanowavetech.com

Copyright © 2025 NANOWAVE Technologies Inc. All rights reserved.
 The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

| | | | | | |
|--|------|----|----------------------|-----|--|
| Size (L, W, H) | inch | | 8.0 16.73 1.72 | | The SSPA comes in a very compact housing |
| Weight | kg | | tbd | | |
| AC Power Supply Input Voltage (nominally 230 V single line) | V | 95 | | 240 | fulfils the EMC requirements according to EN 61000-3-2 (class A) |
| Water Cooling | W | | | 600 | (tbd) ^{see below note)} |
| Has to withstand Ionizing Radiation! | | | | | |

Notes: Specifications subject to change without notice.

Water Cooling System

| Measurement | Value | Remarks |
|---|-----------------|---------|
| Medium | Deionized water | 1) |
| Conductivity | < 1 µS/cm | |
| pH-value | 7 to 9 | |
| Oxygen content | < 0.1 mg/l | |
| Inlet temperature | 25 °C ± 2 °C | |
| Maximum allowed outlet temperature | 45 °C | |
| Maximum regular pressure | 13 bar | 2) |
| Peak pressure | 15 bar | 2) |
| Difference pressure | ≤ 1 bar | |
| Medium | Deionized water | 1) |

Notes:

- 1) All materials of the cooling circuits must be suited for deionized water. If other materials than stainless steel, copper, zinc-free cast-bronze, or plumb-free tin solder are to be used, the ordering party must be asked for permission.
- 2) These are the specifications of a typical water cooling system. If these high pressures are technically or economically not justifiable, a pressure-reducing valve can be used to reduce the maximum regular pressure to 6 bar and the peak pressure to 8 bar. The ordering party must be asked for permission for this option.

As connects for the water, Swagelok® quick connects are recommended. The details must be arranged with the ordering party.

Digital Control Interface

The SSPA can be monitored and controlled via RS232 connection. An **Ethernet TCP/IP** based interface is available as option. The standard Communication Protocol via RS232 is SCPI (Standard Commands for Programmable Instruments). Optionally, higher-level communication protocols (e.g. MODBUS, CAN-Bus) can be implemented. A web-browser based GUI (Graphical User Interface) is optionally available.

Monitored parameters are:

NANOWAVE Technologies Inc.

425 Horner Avenue
 Etobicoke, ON M8W 4W3
 Canada
 Phone: +1 416 252-5602
 Fax: +1 416 252-7077
 Email: sales@nanowavetech.com

Copyright © 2025 NANOWAVE Technologies Inc. All rights reserved.
 The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

NWPA2040-50

2 – 4GHz 100W (CW)

Broadband Linear SSPA



NANOWAVE
Technologies Inc.

v 2.5

- Temperatures
- Voltages
- Current Failures
- RF Power OK
- General Status

The following functions can be remote controlled:

- RF Power ON / OFF
- SSPA Standby / Operate (optional)
- (further options on request)

NANOWAVE Technologies Inc.

425 Horner Avenue
Etobicoke, ON M8W 4W3
Canada

Phone: +1 416 252-5602

Fax: +1 416 252-7077

Email: sales@nanowavetech.com

Copyright © 2025 NANOWAVE Technologies Inc. All rights reserved.

The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

Outline Drawing

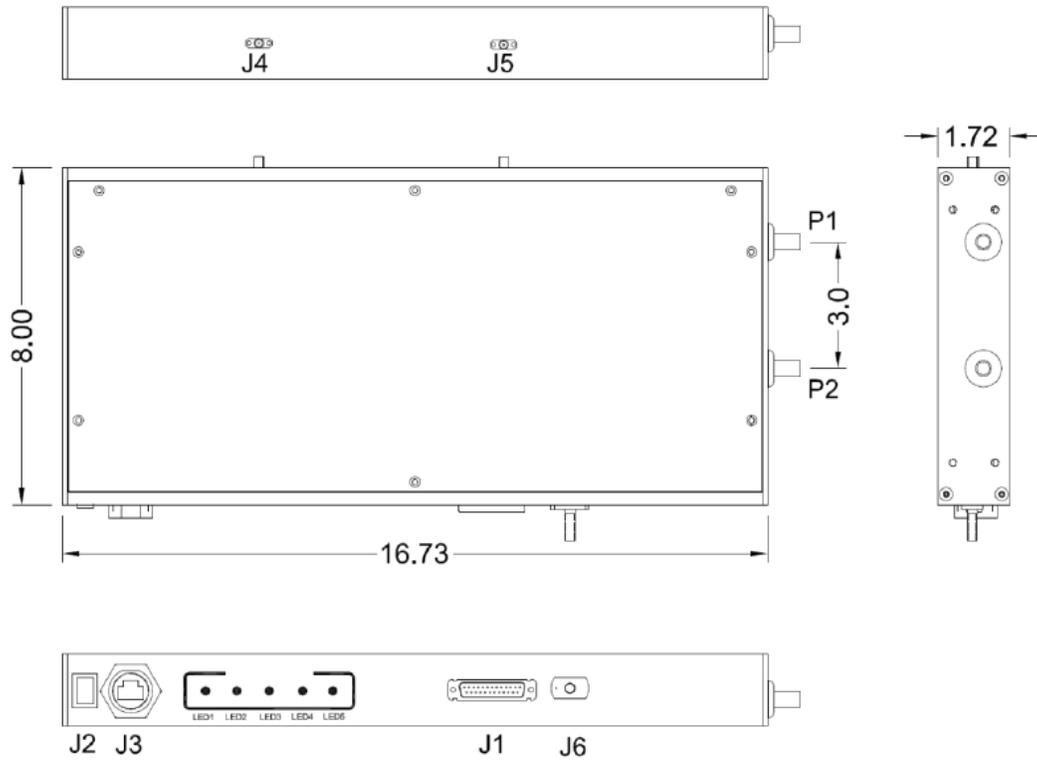


Fig 2: Outline Drawing of SSPA Unit

Table 1: List of Connectors

| | |
|----|----------------------|
| J1 | DC Power Supply DB25 |
| J2 | RF On/Off Switch |
| J3 | LAN |
| J4 | RF input |
| J5 | RF output |
| J6 | Safety GND Terminal |

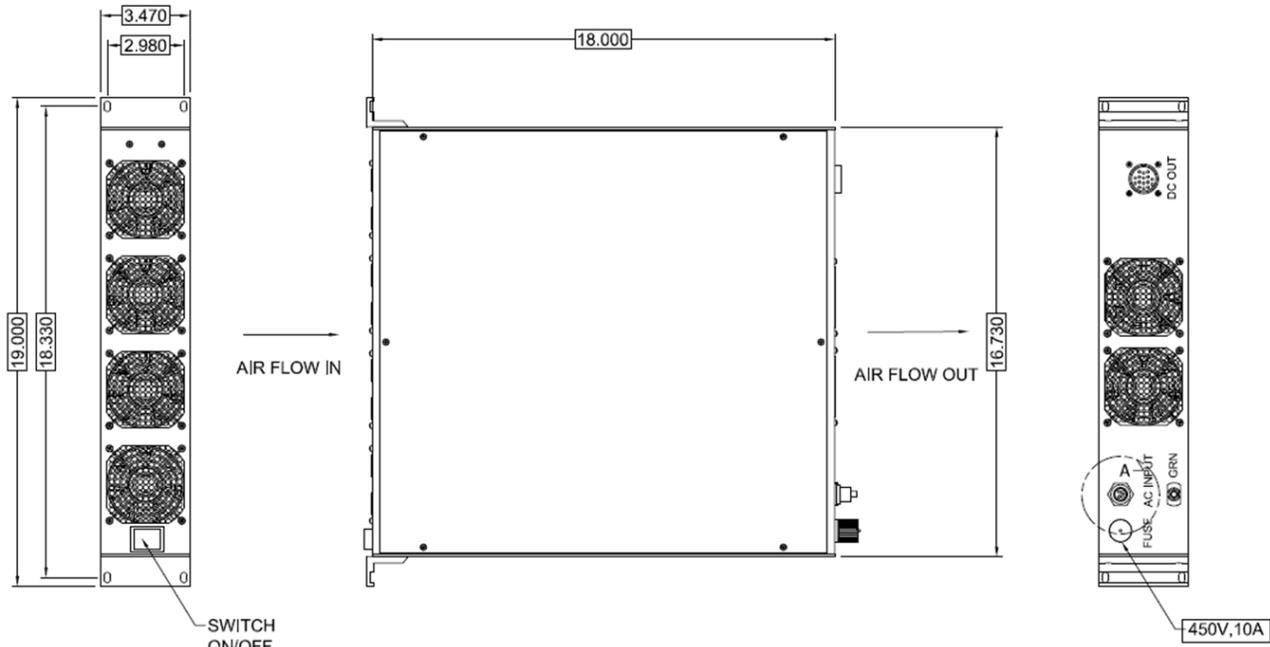


Fig 3: Outline Drawing of Power Supply Unit

Fig

Additional features:

- Marking: the unit is marked with manufacturer part no., date code, and Serial Number.
- All plating and painting is RoHS compliant

For further information please contact NANOWAVE Technologies Inc. at sales@nanowavetech.com, or call at (+1) 416-252-5602.