

GENERAL DESCRIPTION

The NWSPA905101-55 is a GaN-based Solid-State Power Amplifier offering 300W peak output power over a 1.1GHz band with center frequency of 9.55 GHz.

NANOWAVE also offers compatible EPCs to this unit.

The SSPA package and connectivity interfaces are customizable allowing form-fit functionality to customer requirements.



(Product photo with optional WG filter and combiner)

FEATURES

- High efficiency GaN SSPA
- Multiple SSPAs combination for increased output power levels
- Gain And phase calibration capability for optimized output power in combined systems
- Voltage and temperature monitoring
- Space qualified

APPLICATIONS

- Synthetic Aperture Radar (SAR) for LEO satellite

ELECTRICAL PARAMETERS

Parameter	Unit	Min	Typ	Max	Remarks
Center Frequency (CF)	GHz		9.55		
Operational Bandwidth	GHz		1.1		
Input Power	dBm		-39		
RF Peak Output Power	dBm	54	55		At the nominal input power and over the defined duty cycle and PRF.
PAE	%		32		
Duty Cycle	%			15	

NANOWAVE Technologies Inc.

425 Homer Avenue
Etobicoke, ON M8W 4W3
Canada
Phone: +1 416 252-5602
Fax: +1 416 252-7077
Email: sales@nanowavetech.com

Copyright © 2025 NANOWAVE Technologies Inc. All rights reserved.
The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

NWSPA905101-55

9 – 10GHz 300W

X-Band SSPA



v 2.4

Parameter	Unit	Min	Typ	Max	Remarks
Pulse Repetition Frequency (PRF)	kHz	4		12	PRF range for which all requirements are applicable. Wider PRF range possible.
RF Output Pulse Power variation over temperature range	dB/10°C			0.05	Over the defined operational temperature range
Pulse Output Power variation over frequency	dB			0.8	
Pulse Output Power variation between pulses	dB			0.1	Over any 5 second duration
Output Phase variation over frequency within any single pulse	°			20	Deviation from linear phase
Pulse Output Phase variation between pulses	°			1	Over any 5 second duration
AM to AM Conversion	dB/dB			0.2	Given an input power variation of ± 1 dB with respect to the defined nominal input power level
AM to PM Conversion	°/dB			5	Given an input power variation of ± 1 dB with respect to the defined nominal input power level
Harmonic Output Level	dBc			-50	
In-pulse Signal-to-Noise Ratio	dB	40			
Noise power density between pulses	dBm/MHz			-100	Measured Noise density 1us after and 1us before a transmission pulse
RF Input VSWR	-			1.35:1	
RF Output VSRW	-			1.35:1	
Output Phase Adjustment Range	°	330			Used for calibration when multiple SSPAs are combined in parallel to achieve optimal power

SUPPLY VOLTAGES

Parameter	Unit	Min	Typ.	Max	Remarks
Current @ +28V	A		4.2		1)
Current @ +24.5V	A		1.2		1)
Current @ +42V	A		0.007		1)
Current @ +14V	A		0.02		1)
Current @ +5V	A		0.025		1)
Current @ +2.5V	A		0.3		1)
Current @ -7V	A		0.03		1)

Note:

- 1) At 15% duty cycle operation.

High Efficiency EPC is available from NANOWAVE to provide the SSPA voltage supply rails from a 28V primary bus.

NANOWAVE Technologies Inc.

425 Homer Avenue
Etobicoke, ON M8W 4W3
Canada
Phone: +1 416 252-5602
Fax: +1 416 252-7077
Email: sales@nanowavetech.com

Copyright © 2025 NANOWAVE Technologies Inc. All rights reserved.
The information in this document is subject to change without notice. NANOWAVE and the NANOWAVE logo are trademarks of NANOWAVE Technologies Inc. Other trademarks, product and company names are the property of their respective owners and do not imply specific product and/or vendor endorsement or association.

Mechanical and Environmental Parameters

Parameter	Unit	Min	Typ	Max	Remarks
Operation Acceptance Temperature Range	°C	-15		+65	
Operation Qualification Temperature Range	°C	-20		+70	
Non-Operational Acceptance Temperature Range	°C	-30		+80	
Non-Operational Qualification Temperature Range	°C	-35		+85	
Unit Envelope	mm		165 x 132 x 120		
Weight	gram			1320	
Total Ionizing Dose (TID)	krad	30			

Connector Interfaces

Interface	Interface Type	Remarks
RF Input Interface	SMA	
RF Output Interface	Waveguide	WR-90 with a 6 hole flange
DC Power, Control and Telemetry Interface	D-sub	37-pin standard density, Male

Monitor and Control Interface


TELECOMAND INTERFACES

Control Signal	Signal Type	Input Signal Voltage Level	Remarks
RF_GATE	Level Control, Active High	0 to 3.3V	18% maximum duty cycle
Phase Control	Analog Voltage Level control	0 to 3V	Output Phase shift control dependent on voltage setting

TELEMETRY INTERFACES

Telemetry Signal	Signal Type	Output Signal Voltage Level	Remarks
Drain and Gate Bias Telemetry	Analog Voltage Level Telemetry	0 to 2.5V	Calibration curve will be provided for each equipment to convert the analog voltage signal to temperature and voltage
Temperature Telemetry	Analog Voltage Level Telemetry	0 to 2.5V	

OUTLINE DRAWING

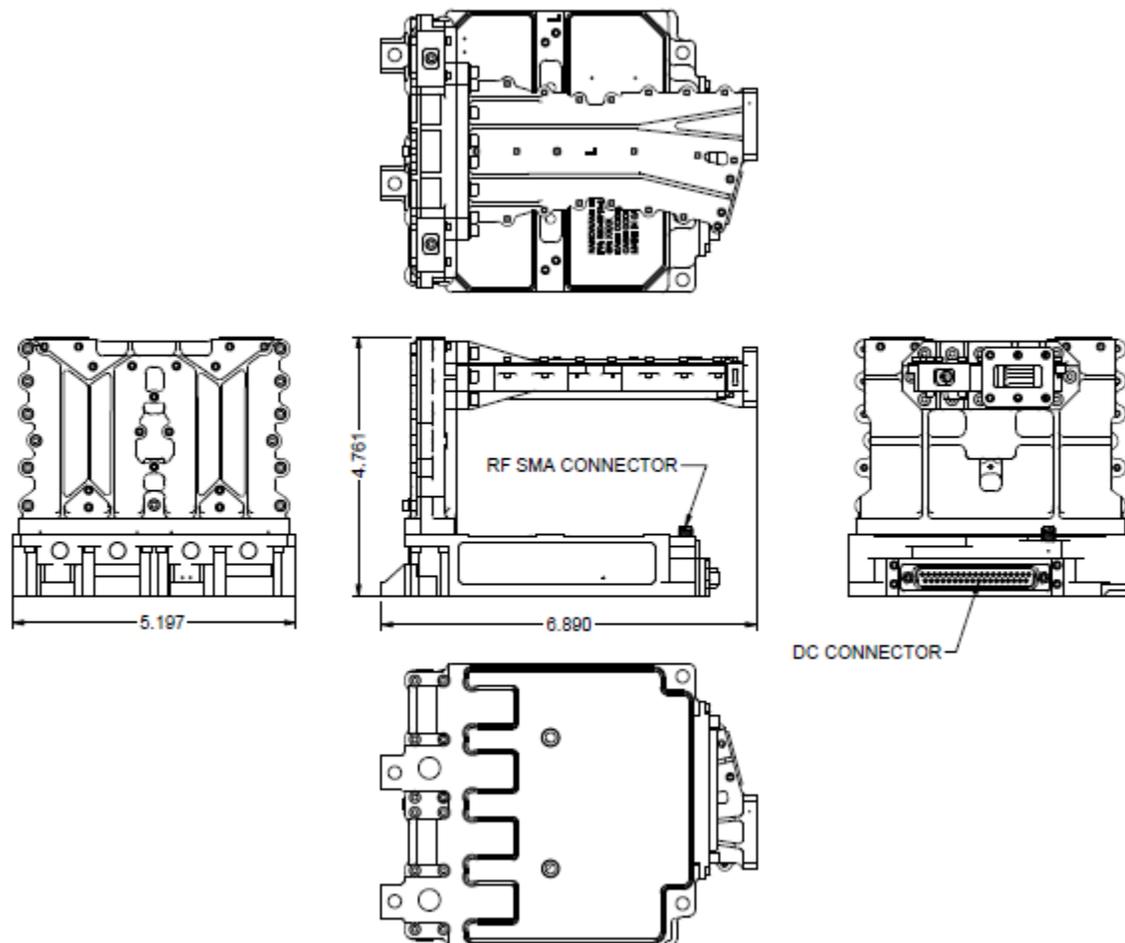

**Fig 1: Outline Drawing of the X-Band 300W SSPA
(includes an optional WG filter)**

Additional features:

- Marking: The unit is marked with manufacturer part no., date code, and Serial Number.
- All plating and painting is RoHS compliant

For further information please contact NANOWAVE Technologies Inc. at sales@nanowavetech.com , or call at (+1) 416-252-5602